



G50 AL series New Available



Reliable operation


■C-Spool technology




■Useful Reset Button



Compatible



W




A

■Specifications




Model	G50 AL series	
Diaphragm Material	Rubber	PTFE
Max discharge volume	670 L/min (177 Gallon/min)	640 L/min (169 Gallon/min)
Max discharge pressure	0.7MPa (100psi)	
Max air consumption	5400 L/min(ANR) (190.9 SCFM)	5400 L/min(ANR) (190.9 SCFM)
Self suction lift(from dry)	3.5m	1.3m
Noize	88.5 dB [88.5 dB(A)]	96.5 dB [96.5 dB(A)]
Inlet Outlet	Rc/NPT 2"	
Air supply	NPT 3/4 or Rc3/4(with adapter)	
Air exhaust	NPT 1" Muffler	
Hight in thread center	48 mm (1.89in)	
Hight out thread center	635 mm (25in)	
Distance between in-out	587 mm (23.11in)	
Air supply port	264 mm (10.39in)	
Foot print	257 mm × 229 mm × 14 mm (10.1in × 9.0in × 0.6in)	
weight	29 kg (63.9 lbs)	30 kg (66.1 lbs)相当

■Dimensions

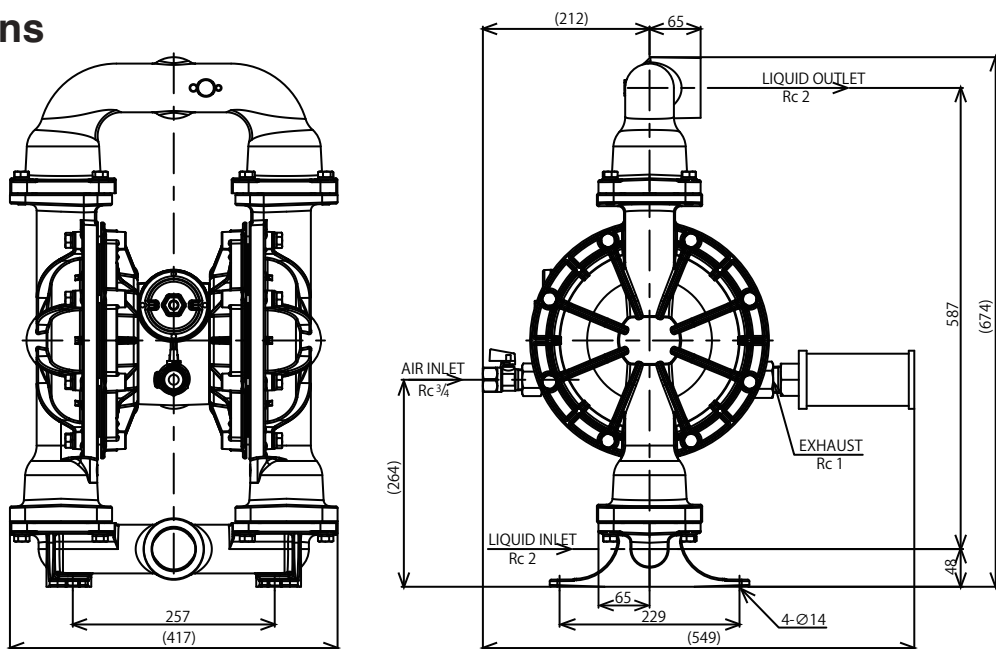

■Performance Curve

• G50AN

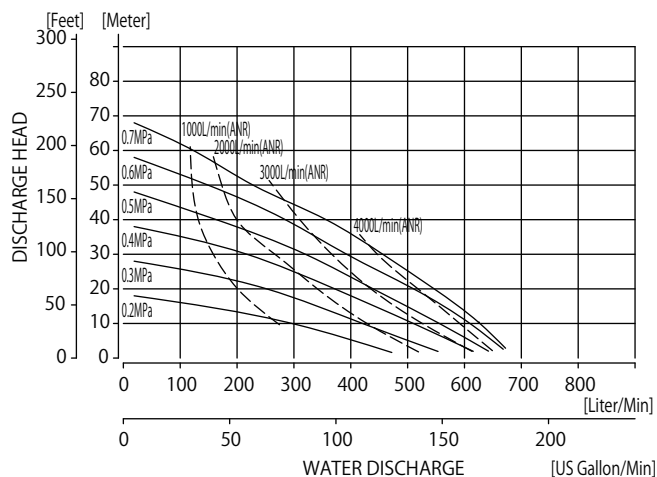

• G50AT

